


Easy CramBible Lab

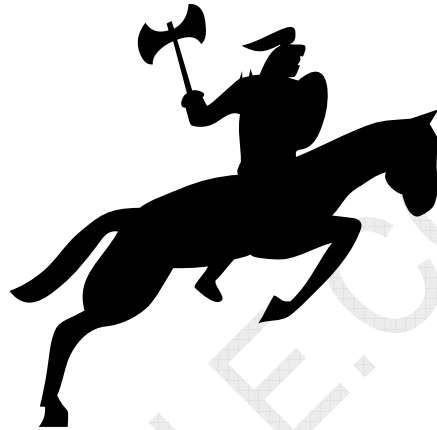

HP0-A20

Install, Maintain and Upgrade NS-Series Hardware

**** Single-user License ****

This copy can be only used by yourself for educational purposes

Web: <http://www.crambible.com/>

E-mail: web@crambible.com

Important Note
Please Read Carefully**Study Tips**

This product will provide you questions and answers along with detailed explanations carefully compiled and written by our experts. Try to understand the concepts behind the questions instead of cramming the questions.

Go through the entire document at least twice so that you make sure that you are not missing anything.

Latest Version

We are constantly reviewing our products. New material is added and old material is revised. Free updates are available for 90 days after the purchase. You should check your member zone at CramBible an update 3-4 days before the scheduled exam date.

Here is the procedure to get the latest version:

1. Go to www.CramBible.com
2. Click on Member zone/Log in
3. The latest versions of all purchased products are download from here. Just click the links.

For most updates, it is enough just to print the new questions at the end of the new version, not the whole document.

Feedback

Feedback on specific questions should be send to web@CramBible.com. You should state: Exam number and version, question number, and login ID.

Our experts will answer your mail promptly.

Copyright

Each pdf file contains a unique serial number associated with your particular name and contact information for security purposes. So if we find out that a particular pdf file is being distributed by you, CramBible reserves the right to take legal action against you according to the International Copyright Laws.

THE TOTAL NUMBER OF QUESTIONS IS 152.

QUESTION NO: 1 Which utility is used to set the IP address in the ServerNet switch board?

- A. SCF
- B. DSM/SCM
- C. Low-level Link
- D. OSM Service Connection

Answer: C

QUESTION NO: 2 Which tools are used to evaluate system performance and growth? (Select two.)

- A. Measure
- B. DSM/TC
- C. DSM/SCM
- D. OSM Service Connection
- E. Tandem Capacity Model (TCM)

Answer: A, E

QUESTION NO: 3 When upgrading an existing 8-processor DMR system to a 16-processor DMR system, what is the minimum hardware required?

- A. one P-Switch
- B. two racks
- C. four Blade complexes
- D. two Blade complexes

Answer: D

QUESTION NO: 4 Where can you find release-specific fallback information? (Select two.)

- A. NonStop eCatalog
- B. Total Web Support (TWS)
- C. NonStop Technical Library (NTL)
- D. Release Version Update (RVU) softdocs

E. Guardian Performance Analyzer (GPA) manual

Answer: C, D

QUESTION NO: 5 What is the maximum number of Disk Drive Enclosures (DDEs) that can be daisy-chained together?

- A. 3
- B. 2
- C. 4
- D. None

Answer: C

QUESTION NO: 6 Which precautions should be taken before shutting down an NS-series server? (Select two.)

- A. Perform a DCOM.
- B. Identify current SYSnn.
- C. Capture an SCF Snapshot.
- D. Execute a SETTIME command.
- E. Perform an SCF SAVE CONFIGURATION.

Answer: B, E

QUESTION NO: 7 How is Instant Support Enterprise Edition (ISEE) used on NS-series systems? (Select two.)

- A. for accessing Scout
- B. for sending outbound messages
- C. for sending CPU dump files automatically
- D. for collecting server configuration modifications
- E. for receiving inbound GMCS support activities

Answer: B, E

QUESTION NO: 8 Which cable type connects a NonStop NS16000 system to a 6770 ServerNet Cluster switch?

- A. ECL adapter cable

- B. multimode fiber optic
- C. single-mode fiber optic
- D. ServerNet adapter cable

Answer: C

QUESTION NO: 9 Which statement is true regarding an ESD protection kit?

- A. It discharges EMF to ground.
- B. It connects to any AC power source.
- C. It protects people against electrical discharge.
- D. It protects components against electrostatic discharge.

Answer: D

QUESTION NO: 10 What input power do NonStop NS16000 Carrier Grade systems require?

- A. a single -48 V DC source
- B. two separate -48 V DC sources
- C. 3-phase 208 V AC, 20 amp source
- D. a single-phase 120 V AC, 15 amp source

Answer: B

QUESTION NO: 11 What is the maximum acceptable RMS voltage measured between neutral and ground for powering NonStop NS-series systems?

- A. 1
- B. 3
- C. 5
- D. 6

Answer: B

QUESTION NO: 12 What is the maximum allowable length of an MMF cable between a VIO enclosure and a Fibre Channel Disk Module?

- A. 25 meters (82 feet)
- B. 80 meters (262 feet)

- C. 250 meters (820 feet)
- D. 400 meters (1312 feet)

Answer: C

QUESTION NO: 13 What is used to replace a SWAN/SWAN2 concentrator?

- A. SCF
- B. SP Tool
- C. WAN Wizard PRO
- D. OSM replace action

Answer: A

QUESTION NO: 14 Which component has a specific Check if Safe to Replace OSM action?

- A. NonStop Blade Element (NSBE)
- B. Gigabit ServerNet Adapter (G4SA)
- C. Logical Synchronization Unit (LSU)
- D. Fibre Channel Disk Module (FCDM)

Answer: A