


Easy CramBible Lab

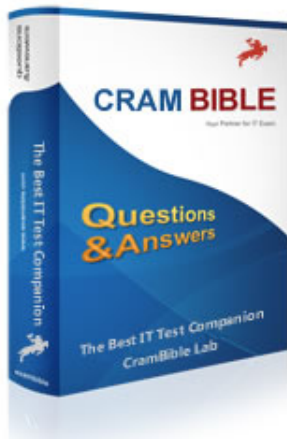

000-376

**IBM WebSphere MQ
V7.0, Solution Design**

**** Single-user License ****

This copy can be only used by yourself for educational purposes.

Web: <http://www.crambible.com/>

E-mail: web@crambible.com

Important Note
Please Read Carefully**Study Tips**

This product will provide you questions and answers along with carefully compiled and written by our experts. Try to understand the concepts behind the questions instead of cramming the questions.

Go through the entire document at least twice so that you make sure that you are not missing anything.

Latest Version

We are constantly reviewing our products. New material is added and old material is revised. Free updates are available for 90 days after the purchase. You should check your member zone at CramBible an update 3-4 days before the scheduled exam date.

Here is the procedure to get the latest version:

1. Go to www.CramBible.com
2. Click on Member zone/Log in
3. The latest versions of all purchased products are download from here. Just click the links.

For most updates, it is enough just to print the new questions at the end of the new version, not the whole document.

Feedback

Feedback on specific questions should be send to web@CramBible.com. You should state: Exam number and version, question number, and login ID.

Our experts will answer your mail promptly.

Copyright

Each pdf file contains a unique serial number associated with your particular name and contact information for security purposes. So if we find out that a particular pdf file is being distributed by you, CramBible reserves the right to take legal action against you according to the International Copyright Laws.

THE TOTAL NUMBER OF QUESTIONS IS 98**QUESTION NO: 1**

Which new feature in WebSphere MQ V7.0 needs to be taken into account when WebSphere MQ solutions are deployed into mixed z/OS and distributed environments?

- A. Queue sharing groups are now available between z/OS and other platforms; however, at least one queue manager in the group must still be hosted on z/OS.
- B. The use of WebSphere MQ Explorer for the administration of z/OS based queue managers no longer requires a license for the Client Attachment Feature (CAF) for a limited number of users.
- C. WebSphere MQ Client applications from distributed environments can now directly connect to z/OS queue managers; the Client Attachment Feature (CAF) is no longer required.
- D. A WebSphere MQ Client implementation on z/OS is now available, so that full WebSphere MQ no longer needs to be installed on all z/OS systems that want to participate in message queuing.

Answer: B

QUESTION NO: 2

An application queue is triggered for trigger type of DEPTH. Following this, what action should the job or program that was started as a result of the trigger take before it ends, so that the queue will be triggered again the next time that trigger depth (TRIGDPTH) is reached?

- A. It needs to use MQSET or an ALTER QLOCAL command to reset triggering (TRIGGER) for the queue.
- B. It needs to reset trigger depth (TRIGDPTH) for the queue through an MQSET or ALTER QLOCAL command.
- C. It needs to reset trigger depth (TRIGDPTH) and triggering (TRIGGER) for the queue, using MQSET or an ALTER QLOCAL command.
- D. No action needs to be taken. The queue manager will create the next trigger message when the current depth of the queue once again reaches trigger depth (TRIGDPTH).

Answer: A

QUESTION NO: 3

An application is required to retrieve rows from a relational database table and send them across WebSphere MQ to a remote queue manager, where a receiving application consumes them. After a

successful MQPUT of a message, the corresponding row is to be deleted from the database. It is intended to run this application using the free WebSphere MQ Client. The delivery of each message is to be guaranteed. Which of the following is true about this implementation?

- A. It cannot be done using the free WebSphere MQ Client; the Extended Transactional Client is required, since two phase commits are needed for this solution.
- B. It cannot be done using the free WebSphere MQ Client; a local queue manager is required to support the guaranteed delivery of the messages.
- C. This solution can be implemented using the free WebSphere MQ Client, provided that the receiving application can recognize and handle repeated delivery of the same message.
- D. This solution cannot be implemented using the free WebSphere MQ Client; persistent messaging is not supported by the free WebSphere MQ Client.

Answer: C

QUESTION NO: 4

A solution developer is writing a C language application on a UNIX platform. There is a requirement for the transactions to be processed within syncpoint control. What is the MINIMUM required MQ component on the application platform to achieve this functionality?

- A. WebSphere MQ Client Installation
- B. WebSphere MQ Extended Transactional Client Installation
- C. WebSphere MQ Server Installation
- D. WebSphere MQ Server Installation with the XA capabilities configured

Answer: A

QUESTION NO: 5

A master data management solution has been implemented for the enterprise. Updates with customer and product data need to be distributed to several applications. What is the BEST approach given that not all applications might be interested in every customer type?

- A. Use the publish/subscribe paradigm.
- B. Receive updates on application-specific queues. Message properties and selectors should be used for filtering.
- C. Browse a common queue for updates.

D. Use a request-reply pattern and query the MDM (Master Data Management) application.

Answer: A

QUESTION NO: 6

A new WebSphere MQ application with high volume requirements is being designed to run on Solaris. The solution designer is concerned about the performance of the application. The WebSphere MQ for Solaris V7 Performance Evaluation Report SupportPac provides all but one of the following types of information to the solution designer. Which is NOT discussed in this document?

- A. Suggestions for tuning WebSphere MQ
- B. Information that can be used to size the company new application
- C. Evaluation of the relative cost of one WebSphere MQ API vs. another in different scenarios
- D. Evaluation of the relative cost of persistent messages vs. nonpersistent messages in different scenarios

Answer: C

QUESTION NO: 7

Which of the following should generally be avoided if an application is being designed for optimal efficiency?

- A. Make messages nonpersistent if they do not need to be recoverable.
- B. Code programs to open and close queues, or connect and disconnect from the queue manager only once, if the queues or connection will be used again.
- C. Bundle the data to be transmitted into as few messages as possible (e.g., rather than sending a hundred 1MB messages, send one 100MB message).
- D. Group a batch of messages within a unit of work where appropriate, so that they can be committed all at once (e.g., get and put messages under syncpoint and commit them in groups of 10, rather than committing them individually).

Answer: C

QUESTION NO: 8

In designing a solution with availability in mind, the designer is considering the following two alternatives,

one using a cluster queue and the other using a shared queue. In each scenario, Queue Managers QMA and QMB will both be capable of running Application A. In the first scenario, Application A will run on QMA and QMB on Windows accessing cluster queue QA. In the second scenario, Application A will run on QMA and QMB on z/OS accessing shared queue QA. Which of the following describes the availability scenarios in the situation where QMA fails?

- A. For Windows, the delivered messages on QA that Application A on QMA did not get to process are available for processing by Application A on QMB
- B. For z/OS, the delivered messages on QA that Application A on QMA did not get to process are available for processing by Application A on QMB
- C. For Windows, messages from QA that were in flight on QMA when it failed are made available for processing on QMB
- D. For z/OS, messages from QA that were in flight on QMA when it failed are unavailable for processing by QMB

Answer: B

QUESTION NO: 9

A solution designer is evaluating distribution scenarios and wants to understand the circumstances where messages are not delivered as expected. Which of the following are reasons that a message is placed on the DLQ?

- A. A trigger monitor is unable to start the triggered program
- B. The destination queue is full when the program puts the message to the local queue
- C. The queue manager is quiescing when the program puts the message to the queue
- D. A sending message channel agent is unable to perform data conversion when required for the message
- E. The program tries to put a message to an invalid local queue

Answer: A,D

QUESTION NO: 10

An organization has a widely distributed online environment, where applications are connected via WebSphere MQ messaging. A business requirement is brought forward that certain mission critical applications record audit trail data which is to be collected in a central location. No information can be lost. A central data warehouse must be loaded daily with this information as soon as possible after end of business. Which of the following proposed solutions is best in terms of the requirement, reliability and overall performance? The audit trail data is: